
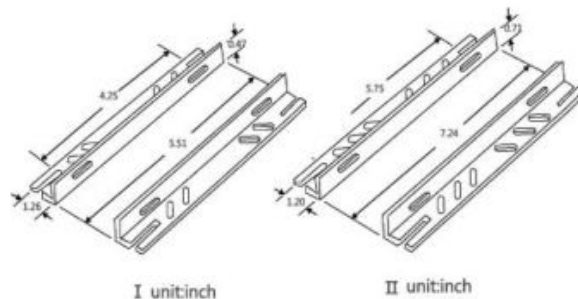


**120/208/240/277V 60Hz**  
**US HIDMagnetic Ballast**  
**HPS/MH[Copper Coil]**  
**120/208/240/277V 60Hz**



Please refer to Figure II ,when the power is above 175w.Other condition, refer to Figure I .

Ballast Model	Lamp Model	Input Voltage(V)	Circuit Type	Rated Power	Circuit Operating Current	Open Circuit Voltage	Power Factor	Size (inch)						(μF)Adapted Capacitor	weight kg	Insulation Class
								A	B	C	D	E	F			
HF-HPF HPS70W.4T.C	S62	120/208/240/277V	HX	70W	1.00/0.57/0.50/0.43A	120V	0.9	3.94	2.83	3.54	2.44	1.93	4.72	8μF /300V	3	H( 180°)
HF-HPF HPS100W.4T.C	S54	120/208/240/277V	HX	100W	1.30/0.75/0.65/0.56A	120V	0.9	3.94	2.83	3.54	2.44	2.24	4.72	10μF /300V	3.4	H( 180°)
HF-HPF HPS150W.4T.C	S55	120/208/240/277V	HX	150W	1.80/1.04/0.90/0.78A	120V	0.9	3.94	2.83	3.54	2.44	2.6	4.72	14μF /300V	3.8	H( 180°)
HF-CWA HPS250W.4T.C	S50	120/208/240/277V	CWA	250W	2.70/1.56/1.35/1.17A	190V	0.9	4.76	4.29	4.37	3.86	2.17	5.51	35μF /300V	6.1	H( 180°)
HF-CWA HPS400W.4T.C	S51	120/208/240/277V	CWA	400W	4.00/2.20/2.00/1.70A	190V	0.9	4.76	4.29	4.37	3.86	2.76	5.51	55μF /300V	7.4	H( 180°)
HF-CWA HPS600W.4T.C	S106	120/208/240/277V	CWA	600W	6.00/3.30/3.00/2.50A	220V	0.9	5.98	4.29	4.37	3.86	3.35	7.09	64μF /300V	10.8	H( 180°)
HF-CWA MH1000W.4T.C	S52	120/208/240/277V	CWA	1000W	9.00/5.30/4.50/3.90A	445V	0.9	5.98	4.29	5.35	3.9	4.33	7.09	26μF /525V	13.5	H( 180°)
HF-HPF MH70W.4T.C	M98	120/208/240/277V	HX	70W	0.90/0.52/0.45/0.39A	250V	0.9	3.94	4.45	3.54	3.9	1.93	4.72	8μF /300V	3	H( 180°)
HF-HPF MH100W.4T.C	M90	120/208/240/277V	HX	100W	1.25/0.72/0.63/0.55A	255V	0.9	3.94	2.83	3.54	2.44	12.24	4.72	12μF /300V	3.4	H( 180°)
HF-HPF MH150W.4T.C	M102	120/208/240/277V	HX	150W	1.80/1.10/0.90/0.74A	255V	0.9	3.94	2.83	3.54	2.44	2.6	4.72	16μF /300V	3.8	H( 180°)
HF-HPF MH175W.4T.C	M57	120/208/240/277V	HX	175W	1.80/1.10/0.90/0.80A	320V	0.9	3.94	2.83	3.5	2.44	2.6	4.72	10μF /400V	3.8	H( 180°)
HF-CWA MH250W.4T.C	M58	120/208/240/277V	CWA	250W	2.50/1.45/1.25/1.10A	300V	0.9	4.76	4.29	4.37	3.86	1.61	5.51	15μF /400V	5.1	H( 180°)
HF-CWA MH400W.4T.C	M59	120/208/240/277V	CWA	400W	4.00/2.30/2.00/1.70A	305V	0.9	4.76	4.29	4.37	3.86	2.36	5.51	24μF /400V	6.6	H( 180°)
HF-CWA MH1000W.4T.C	M47	120/208/240/277V	CWA	1000W	9.00/5.30/4.50/3.90A	420V	0.9	5.75	4.45	5.35	3.94	3.46	7.09	24μF /480V	11.4	H( 180°)